

Ultra High Speed Photoreceiver with InGaAs-PIN Photodiode



The picture shows model HSA-X-S-2G-IN-FS.
The photoreceiver will be delivered without post holder and post.

<p>Features</p>	<ul style="list-style-type: none"> • InGaAs-PIN photodiode • Bandwidth 10 kHz – 2 GHz • Amplifier transimpedance gain 5.0×10^3 V/A • Max. conversion gain 4.75×10^3 V/W @ 1550 nm • Spectral range 900 – 1700 nm • Free-space input 1.035"-40 threaded, alternatively 25 mm diameter unthreaded • UNC 8-32 and M4 tapped holes for mounting on standard posts with metric and imperial thread
<p>Applications</p>	<ul style="list-style-type: none"> • Spectroscopy • Ultra-fast pulse and transient measurements • Optical triggering • Optical front-end for oscilloscopes and ultra-fast A/D converters
<p>Block Diagram</p>	<p style="text-align: right;">BS01-HSA-X-S_R01</p>

Ultra High Speed Photoreceiver with InGaAs-PIN Photodiode

Available Versions

HSA-X-S-2G-IN-FST

1.035"-40 threaded flange for free space applications. Compatible with many optical standard accessories .



Picture shows 1.035"-40 threaded flange with internally threaded coupler ring (outer diameter 30 mm)

HSA-X-S-2G-IN-FS

25 mm dia. unthreaded flange for free space applications. Compatible with many optical standard accessories.



Picture shows unthreaded flange with 25 mm diameter

HSA-X-S-2G-IN-FC

Fix/permanent FC fiber connector for high coupling efficiency and excellent conversion gain accuracy.



Related Models

HSPR-X-I-2G-IN-FST

InGaAs-PIN, \varnothing 0.1 mm, 900 – 1700 nm, inverting output free space input, 1.035"-40 threaded flange

HSPR-X-I-2G-IN-FS

InGaAs-PIN, \varnothing 0.1 mm, 900 – 1700 nm, inverting output free space input, 25 mm dia. unthreaded flange

HSPR-X-I-2G-IN-FC

InGaAs-PIN, integrated ball lens, 900 – 1700 nm, inverting output, FC fiber connector (fix/permanent)

HSPR-X-I-1G4-SI-FST

Si-PIN, \varnothing 0.4 mm, 320 – 1000 nm, inverting output free space input, 1.035"-40 threaded flange


HSPR-X-I-1G4-SI-FS

Si-PIN, \varnothing 0.4 mm, 320 – 1000 nm, inverting output free space input, 25 mm dia. unthreaded flange


HSPR-X-I-1G4-SI-FC

Si-PIN, integrated ball lens, 320 – 1000 nm, inverting output, FC fiber connector (fix/permanent)

Ultra High Speed Photoreceiver with InGaAs-PIN Photodiode


Related Models (continued)	HSA-X-S-1G4-SI-FST HSA-X-S-1G4-SI-FS HSA-X-S-1G4-SI-FC	Si-PIN, Ø 0.4 mm, 320 – 1000 nm free space input, 1.035"-40 threaded flange Si-PIN, Ø 0.4 mm, 320 – 1000 nm free space input, 25 mm dia. unthreaded flange Si-PIN, integrated ball lens, 320 – 1000 nm FC fiber connector (fix/permanent)																														
Available Accessories	PS-15-25-L 	Power supply Input: 100 – 240 VAC Output: ±15 VDC																														
Specifications	<table border="0"> <tr> <td data-bbox="225 786 513 884"></td> <td data-bbox="513 786 861 884"> Test conditions </td> <td data-bbox="861 786 1458 884"> $V_S = +15\text{ V}$, $T_A = 25\text{ °C}$, output load impedance $50\ \Omega$, warm-up 20 minutes (min. 10 minutes recommended) </td> </tr> <tr> <td data-bbox="225 884 513 963"> Gain </td> <td data-bbox="513 884 861 963"> Transimpedance gain Conversion gain </td> <td data-bbox="861 884 1458 963"> $5.0 \times 10^3\text{ V/A}$ (@ output load $50\ \Omega$) $4.75 \times 10^3\text{ V/W typ.}$ (@ 1550 nm, output load $50\ \Omega$) </td> </tr> <tr> <td data-bbox="225 963 513 1041"> Frequency Response </td> <td data-bbox="513 963 861 1041"> Lower cut-off frequency (–3 dB) Upper cut-off frequency (–3 dB) </td> <td data-bbox="861 963 1458 1041"> 10 kHz 2 GHz ($\pm 15\%$) </td> </tr> <tr> <td data-bbox="225 1041 513 1108"> Time Response </td> <td data-bbox="513 1041 861 1108"> Rise/fall time (10 % – 90 %) </td> <td data-bbox="861 1041 1458 1108"> 180 ps ($\pm 15\%$) </td> </tr> <tr> <td data-bbox="225 1108 513 1220"> Input </td> <td data-bbox="513 1108 861 1220"> Noise equivalent power (NEP) Optical saturation power </td> <td data-bbox="861 1108 1458 1220"> $16\text{ pW}/\sqrt{\text{Hz}}$ (@ 1550 nm, 100 MHz) 200 $\mu\text{W AC}$ (for linear amplification, @ 1550 nm) 10 mW CW (to prevent saturation, @ 1550 nm) </td> </tr> <tr> <td data-bbox="225 1220 513 1422"> Detector </td> <td data-bbox="513 1220 861 1422"> Detector Active area (FS/FST version) Active area (FC version) </td> <td data-bbox="861 1220 1458 1422"> InGaAs-PIN photodiode $\varnothing 100\ \mu\text{m}$ integrated ball lens, suitable for fibers up to 62.5 μm core diameter </td> </tr> <tr> <td data-bbox="225 1422 513 1646"> Output </td> <td data-bbox="513 1422 861 1646"> Output voltage range Output VSWR Output return loss Output impedance Output noise </td> <td data-bbox="861 1422 1458 1646"> 1.9 V_{PP} (@ $50\ \Omega$ output load) for linear operation and low harmonic distortion 2.5:1 (@ $f < 2.5\text{ GHz}$) 7.3 dB (@ $f < 2.5\text{ GHz}$) $50\ \Omega$ (terminate with $50\ \Omega$ load) 3.6 mV_{RMS} (24 mV_{PP}) typ. (@ $50\ \Omega$ load, no signal on detector, measurement bandwidth 4 GHz MHz) </td> </tr> <tr> <td data-bbox="225 1646 513 1724"> Input Flange </td> <td data-bbox="513 1646 861 1724"> Material </td> <td data-bbox="861 1646 1458 1724"> 1.4305 stainless steel, nickel-plated (FST flange) AlMg4.5Mn, nickel-plated (FS flange) </td> </tr> <tr> <td data-bbox="225 1724 513 1803"> Coupler Ring (FST version only) </td> <td data-bbox="513 1724 861 1803"> Material </td> <td data-bbox="861 1724 1458 1803"> 1.4305 stainless steel, glass bead blasted </td> </tr> <tr> <td data-bbox="225 1803 513 2056"> Power Supply </td> <td data-bbox="513 1803 861 2056"> Supply voltage Supply current </td> <td data-bbox="861 1803 1458 2056"> +15 V 130 mA (depends on operating conditions, recommended power supply capability min. 200 mA) </td> </tr> </table>			Test conditions	$V_S = +15\text{ V}$, $T_A = 25\text{ °C}$, output load impedance $50\ \Omega$, warm-up 20 minutes (min. 10 minutes recommended)	Gain	Transimpedance gain Conversion gain	$5.0 \times 10^3\text{ V/A}$ (@ output load $50\ \Omega$) $4.75 \times 10^3\text{ V/W typ.}$ (@ 1550 nm, output load $50\ \Omega$)	Frequency Response	Lower cut-off frequency (–3 dB) Upper cut-off frequency (–3 dB)	10 kHz 2 GHz ($\pm 15\%$)	Time Response	Rise/fall time (10 % – 90 %)	180 ps ($\pm 15\%$)	Input	Noise equivalent power (NEP) Optical saturation power	$16\text{ pW}/\sqrt{\text{Hz}}$ (@ 1550 nm, 100 MHz) 200 $\mu\text{W AC}$ (for linear amplification, @ 1550 nm) 10 mW CW (to prevent saturation, @ 1550 nm)	Detector	Detector Active area (FS/FST version) Active area (FC version)	InGaAs-PIN photodiode $\varnothing 100\ \mu\text{m}$ integrated ball lens, suitable for fibers up to 62.5 μm core diameter	Output	Output voltage range Output VSWR Output return loss Output impedance Output noise	1.9 V_{PP} (@ $50\ \Omega$ output load) for linear operation and low harmonic distortion 2.5:1 (@ $f < 2.5\text{ GHz}$) 7.3 dB (@ $f < 2.5\text{ GHz}$) $50\ \Omega$ (terminate with $50\ \Omega$ load) 3.6 mV _{RMS} (24 mV _{PP}) typ. (@ $50\ \Omega$ load, no signal on detector, measurement bandwidth 4 GHz MHz)	Input Flange	Material	1.4305 stainless steel, nickel-plated (FST flange) AlMg4.5Mn, nickel-plated (FS flange)	Coupler Ring (FST version only)	Material	1.4305 stainless steel, glass bead blasted	Power Supply	Supply voltage Supply current	+15 V 130 mA (depends on operating conditions, recommended power supply capability min. 200 mA)
	Test conditions	$V_S = +15\text{ V}$, $T_A = 25\text{ °C}$, output load impedance $50\ \Omega$, warm-up 20 minutes (min. 10 minutes recommended)																														
Gain	Transimpedance gain Conversion gain	$5.0 \times 10^3\text{ V/A}$ (@ output load $50\ \Omega$) $4.75 \times 10^3\text{ V/W typ.}$ (@ 1550 nm, output load $50\ \Omega$)																														
Frequency Response	Lower cut-off frequency (–3 dB) Upper cut-off frequency (–3 dB)	10 kHz 2 GHz ($\pm 15\%$)																														
Time Response	Rise/fall time (10 % – 90 %)	180 ps ($\pm 15\%$)																														
Input	Noise equivalent power (NEP) Optical saturation power	$16\text{ pW}/\sqrt{\text{Hz}}$ (@ 1550 nm, 100 MHz) 200 $\mu\text{W AC}$ (for linear amplification, @ 1550 nm) 10 mW CW (to prevent saturation, @ 1550 nm)																														
Detector	Detector Active area (FS/FST version) Active area (FC version)	InGaAs-PIN photodiode $\varnothing 100\ \mu\text{m}$ integrated ball lens, suitable for fibers up to 62.5 μm core diameter																														
Output	Output voltage range Output VSWR Output return loss Output impedance Output noise	1.9 V_{PP} (@ $50\ \Omega$ output load) for linear operation and low harmonic distortion 2.5:1 (@ $f < 2.5\text{ GHz}$) 7.3 dB (@ $f < 2.5\text{ GHz}$) $50\ \Omega$ (terminate with $50\ \Omega$ load) 3.6 mV _{RMS} (24 mV _{PP}) typ. (@ $50\ \Omega$ load, no signal on detector, measurement bandwidth 4 GHz MHz)																														
Input Flange	Material	1.4305 stainless steel, nickel-plated (FST flange) AlMg4.5Mn, nickel-plated (FS flange)																														
Coupler Ring (FST version only)	Material	1.4305 stainless steel, glass bead blasted																														
Power Supply	Supply voltage Supply current	+15 V 130 mA (depends on operating conditions, recommended power supply capability min. 200 mA)																														

Ultra High Speed Photoreceiver with InGaAs-PIN Photodiode

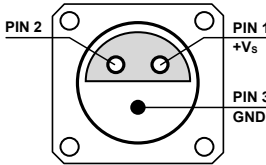Specifications (continued)			
Case	Weight	133 g (0.29 lbs) HSA-X-S-2G-IN-FST incl. coupler ring 120 g (0.26 lbs) HSA-X-S-2G-IN-FS 110 g (0.24 lbs) HSA-X-S-2G-IN-FC	
	Material	AlMg4.5Mn, nickel-plated	
Temperature Range	Storage temperature	-30 °C ... +85 °C	
	Operating temperature	0 °C ... +60 °C	
Absolute Maximum Ratings	Optical input power (CW)	12 mW (averaged)	
	Power supply voltage	20 V	
Connectors	Input	HSA-X-S-2G-IN-FST	1.035"-40 threaded flange for free space applications and for use with various types of optical standard accessories
		HSA-X-S-2G-IN-FS	25 mm dia. unthreaded flange for free space applications
		HSA-X-S-2G-IN-FC	FC fiber optic connector (fix/permanent, FC/PC and FC/APC compatible)
	Output	SMA jack (female)	
	Power supply	LEMO® series 1S, 3-pin fixed socket (mating plug type: FFA.1S.303.CLAC52)	
			
		<p>Pin 1: +15 V Pin 2: NC Pin 3: GND</p>	
Scope of Delivery	HSA-X-S-2G-IN, internally threaded coupler ring (FST version only), LEMO® 3-pin connector, datasheet, transport package		
Ordering Information	HSA-X-S-2G-IN-FST	1.035"-40 threaded flange for free space applications and for use with various types of optical standard accessories.	
	HSA-X-S-2G-IN-FS	25 mm dia. unthreaded flange for free space applications.	
	HSA-X-S-2G-IN-FC	FC fiber optic connector (fix/permanent, FC/PC and FC/APC compatible).	

Ultra High Speed Photoreceiver with InGaAs-PIN Photodiode


Spectral Responsivity

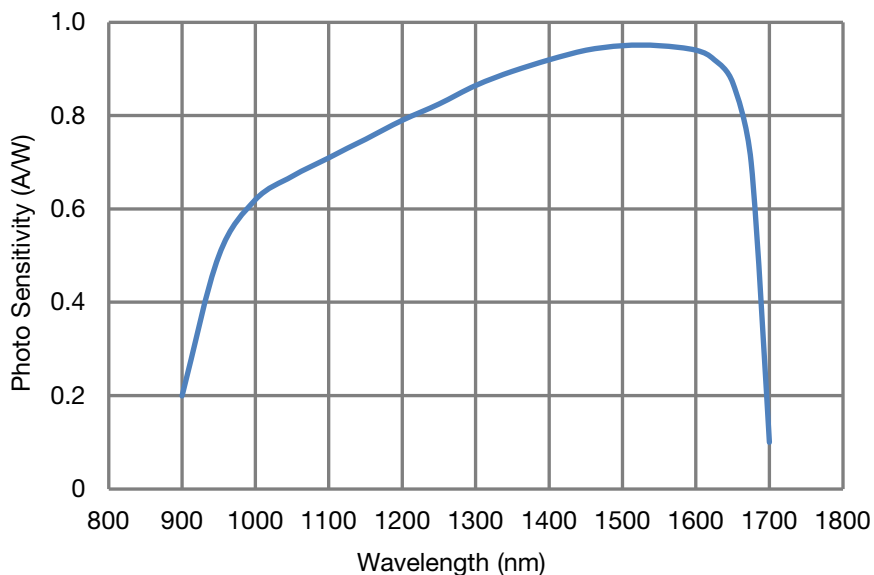

DB-Sens-HSA-X-S-2G-IN_R01

Dimensions

HSA-X-S-2G-IN-FST (1.035"-40 threaded free space input)

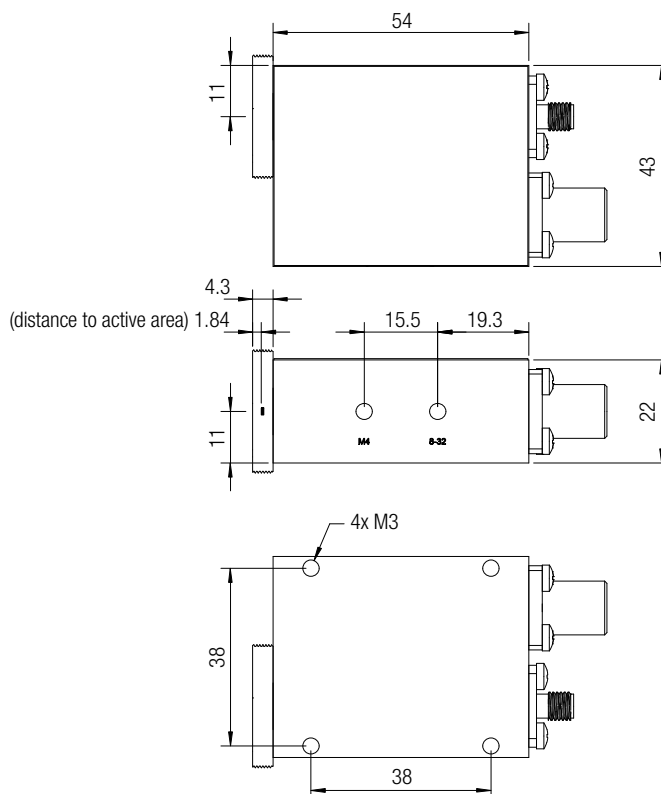


DZ-HSA-X-S-2G-IN_FST_R1

all dimensions in mm unless otherwise noted

**Ultra High Speed Photoreceiver
with InGaAs-PIN Photodiode**

Dimensions (continued)

HSA-X-S-2G-IN-FS (25 mm dia. unthreaded free space input)

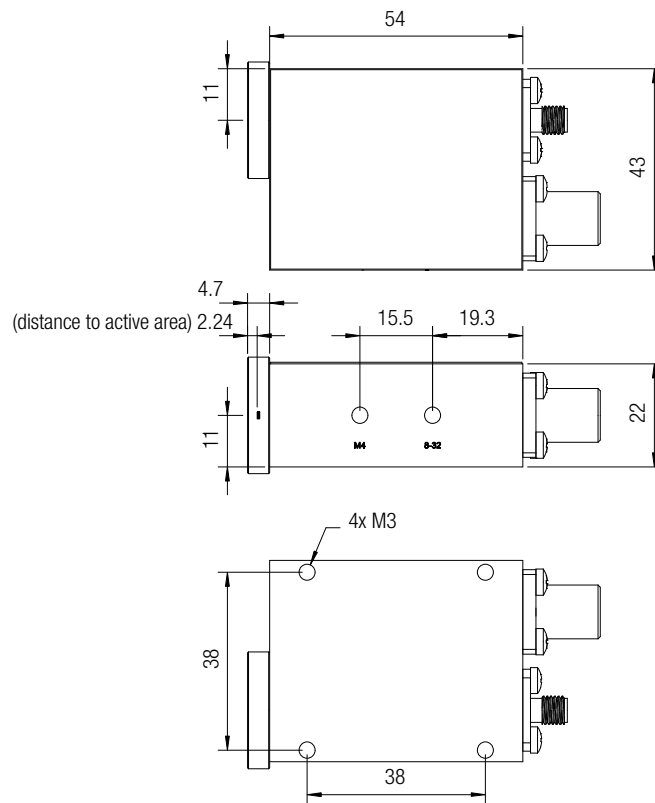


DZ-HSA-X-S-2G-IN_FS_R1

all dimensions in mm unless otherwise noted

Ultra High Speed Photoreceiver with InGaAs-PIN Photodiode

Dimensions (continued)

HSA-X-S-2G-IN-FC (FC fiber optic connector)

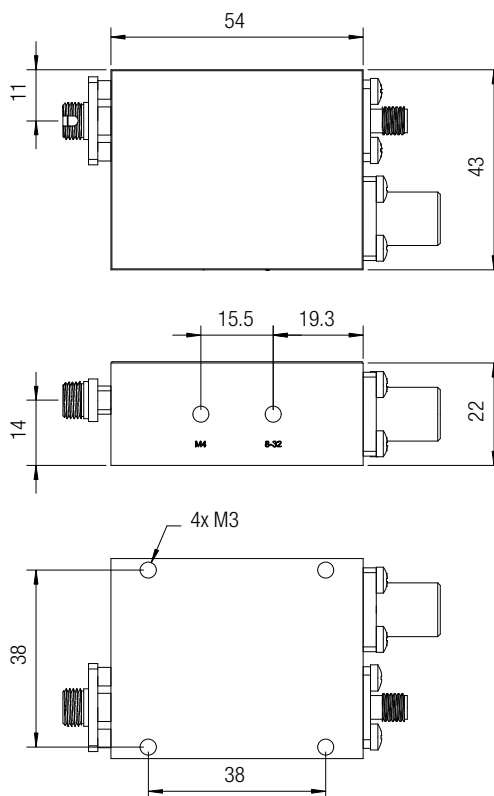

DZ-HSA-X-S-2G-IN_FC_R1

all dimensions in mm unless otherwise noted

FEMTO Messtechnik GmbH
Klosterstr. 64
10179 Berlin · Germany
Phone: +49 30 280 4711-0
Fax: +49 30 280 4711-11
Email: info@femto.de
www.femto.de

Specifications are subject to change without notice. Information provided herein is believed to be accurate and reliable. However, no responsibility is assumed by FEMTO Messtechnik GmbH for its use, nor for any infringement of patents or other rights of third parties which may result from its use. No license is granted by implication or otherwise under any patent or patent rights of FEMTO Messtechnik GmbH. Product names mentioned may also be trademarks used here for identification purposes only.

© by FEMTO Messtechnik GmbH · Printed in Germany