

# JQ2N Series



VIBRATION ANALYSIS HARDWARE


2 Socket Mini-MIL Connector with Grounded Backshell for Class I, Division 2 Locations, Nylon Molded, Permanent Measurements, 250 °F (121 °C) Max Temp

## Product Features

Compatible with CTC Mini-Sized Accelerometers

Grounded Locking Ring for Class 1, Division 2 Installations

- ▶ 2 Socket Connection
- ▶ 316L Stainless Steel Locking Ring

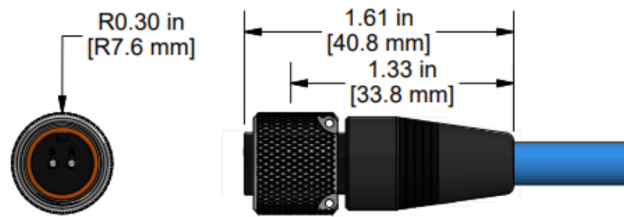

## Specifications

|                           |                                  |
|---------------------------|----------------------------------|
| Application               | Permanent Mount                  |
| Max Temperature           | 250° F (121° C)                  |
| Connector Type            | 2 Socket Mini-MIL                |
| Shell Material            | Nylon                            |
| Connector Insert Material | Nylon                            |
| Rating                    | IP68                             |
| Pin-Out                   | A = Signal (+)<br>B = Common (-) |

**Built to Order**

Backed by our Unconditional Lifetime Warranty  
[www.ctconline.com](http://www.ctconline.com) | [sales@ctconline.com](mailto:sales@ctconline.com) | 585-924-5900