

# Q3AB Series




VIBRATION ANALYSIS HARDWARE

3 Socket MIL-Style, Polycarbonate Molded Connector with Grounded Backshell for Class I, Division 2 Locations, Wired for Interface to Biaxial AC949-1D Sensor Wired as X and Z Entry, Permanent Mount, 250 °F (121 °C) Max Temp

## Product Features

3 Socket Connector for use with Biaxial AC949 Sensors

Grounded Locking Ring for Class 1, Division 2 Installations

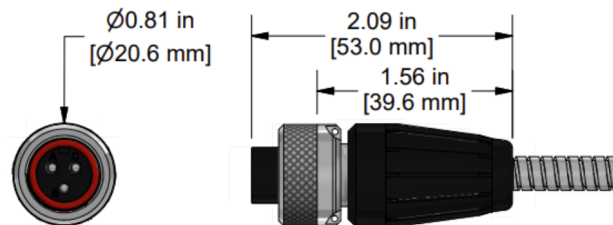

## Specifications

Application	Permanent Installation
Max Temperature	250°F (121°C)
Connector Type	3 Socket MIL-Style
Shell Material	Polycarbonate Molded
Connector Insert Material	Polycarbonate
Pin-Out	A = Signal (+) CTC Green B = Signal (+) CTC White C = Common (-) CTC Black

**Built to Order**

Backed by our Unconditional Lifetime Warranty  
[www.ctconline.com](http://www.ctconline.com) | [sales@ctconline.com](mailto:sales@ctconline.com) | 585-924-5900