

R2J Series

2 Pin Mini-MIL Connector with Rubber Bending Strain Relief,
Polyurethane Molded, 250 °F (121 °C) Max Temp




VIBRATION ANALYSIS HARDWARE

Product Features

Designed to Build Extension Cables with 2
Conductor, Armor Jacketed Cabling

- ▶ Mates with with CTC 2 Socket Mini-MIL Connectors
- ▶ Designed to Withstand a Wide Variety of Industrial Applications
- ▶ Creates an IP66 Rated Seal

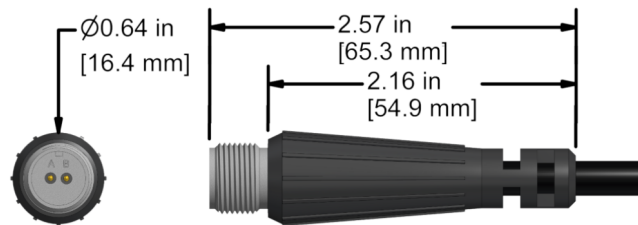

Specifications

Application	Portable Measurements Permanent Mount
Max Temperature	250° F (121°C)
Connector Type	2 Pin Mini-MIL
Shell Material	Polyurethane Molded
Connector Insert Material	Polyurethane
Rating	IP66
Pin-Out	A = Signal (+) B = Common (-)

Built to Order

Backed by our Unconditional Lifetime Warranty
www.ctconline.com | sales@ctconline.com | 585-924-5900