

# Ultra High Speed Photoreceiver with InGaAs-PIN Photodiode



The picture shows model HSPR-X-I-2G-IN-FS.  
The photoreceiver will be delivered without post holder and post.

<p>Features</p>	<ul style="list-style-type: none"> <li>• <b>InGaAs-PIN photodiode</b></li> <li>• <b>Bandwidth 10 kHz – 2 GHz</b></li> <li>• <b>Amplifier transimpedance gain <math>5.0 \times 10^3</math> V/A (inverting)</b></li> <li>• <b>Max. conversion gain <math>4.75 \times 10^3</math> V/W @ 1550 nm</b></li> <li>• <b>Spectral range 900 – 1700 nm</b></li> <li>• <b>Free-space input 1.035"-40 threaded, alternatively 25 mm diameter unthreaded</b></li> <li>• <b>UNC 8-32 and M4 tapped holes for mounting on standard posts with metric and imperial thread</b></li> </ul>
<p>Applications</p>	<ul style="list-style-type: none"> <li>• <b>Spectroscopy</b></li> <li>• <b>Ultra-fast pulse and transient measurements</b></li> <li>• <b>Optical triggering</b></li> <li>• <b>Optical front-end for oscilloscopes and ultra-fast A/D converters</b></li> </ul>
<p>Block Diagram</p>	<p style="text-align: right;">BS01-HSPR_R01</p>

## Ultra High Speed Photoreceiver with InGaAs-PIN Photodiode

Available Versions

HSPR-X-I-2G-IN-FST

1.035"-40 threaded flange for free space applications. Compatible with many optical standard accessories .



Picture shows 1.035"-40 threaded flange with internally threaded coupler ring (outer diameter 30 mm)

HSPR-X-I-2G-IN-FS

25 mm dia. unthreaded flange for free space applications. Compatible with many optical standard accessories.



Picture shows unthreaded flange with 25 mm diameter

HSPR-X-I-2G-IN-FC

Fix/permanent FC fiber connector for high coupling efficiency and excellent conversion gain accuracy.



Related Models

HSA-X-S-2G-IN-FST

InGaAs-PIN, Ø 0.1 mm, 900 – 1700 nm free space input, 1.035"-40 threaded flange

HSA-X-S-2G-IN-FS

InGaAs-PIN, Ø 0.1 mm, 900 – 1700 nm free space input, 25 mm dia. unthreaded flange

HSA-X-S-2G-IN-FC

InGaAs-PIN, integrated ball lens, 900 – 1700 nm, inverting output, FC fiber connector (fix/permanent)

HSPR-X-I-1G4-SI-FST

Si-PIN, Ø 0.4 mm, 320 – 1000 nm, inverting output free space input, 1.035"-40 threaded flange




HSPR-X-I-1G4-SI-FS

Si-PIN, Ø 0.4 mm, 320 – 1000 nm, inverting output free space input, 25 mm dia. unthreaded flange


HSPR-X-I-1G4-SI-FC

Si-PIN, integrated ball lens, 320 – 1000 nm, inverting output, FC fiber connector (fix/permanent)

## Ultra High Speed Photoreceiver with InGaAs-PIN Photodiode


Related Models (continued)	<table border="0"> <tr> <td>HSA-X-S-1G4-SI-FST</td> <td>Si-PIN, Ø 0.4 mm, 320 – 1000 nm free space input, 1.035"-40 threaded flange</td> </tr> <tr> <td>HSA-X-S-1G4-SI-FS</td> <td>Si-PIN, Ø 0.4 mm, 320 – 1000 nm free space input, 25 mm dia. unthreaded flange</td> </tr> <tr> <td>HSA-X-S-1G4-SI-FC</td> <td>Si-PIN, integrated ball lens, 320 – 1000 nm FC fiber connector (fix/permanent)</td> </tr> </table>	HSA-X-S-1G4-SI-FST	Si-PIN, Ø 0.4 mm, 320 – 1000 nm free space input, 1.035"-40 threaded flange	HSA-X-S-1G4-SI-FS	Si-PIN, Ø 0.4 mm, 320 – 1000 nm free space input, 25 mm dia. unthreaded flange	HSA-X-S-1G4-SI-FC	Si-PIN, integrated ball lens, 320 – 1000 nm FC fiber connector (fix/permanent)														
HSA-X-S-1G4-SI-FST	Si-PIN, Ø 0.4 mm, 320 – 1000 nm free space input, 1.035"-40 threaded flange																				
HSA-X-S-1G4-SI-FS	Si-PIN, Ø 0.4 mm, 320 – 1000 nm free space input, 25 mm dia. unthreaded flange																				
HSA-X-S-1G4-SI-FC	Si-PIN, integrated ball lens, 320 – 1000 nm FC fiber connector (fix/permanent)																				
Available Accessories	<table border="0"> <tr> <td>PS-15-25-L</td> <td>                  Power supply                  Input: 100 – 240 VAC                  Output: ±15 VDC             </td> </tr> </table>	PS-15-25-L	 Power supply Input: 100 – 240 VAC Output: ±15 VDC																		
PS-15-25-L	 Power supply Input: 100 – 240 VAC Output: ±15 VDC																				
Specifications	<table border="0"> <tr> <td>Test conditions</td> <td><math>V_S = +15\text{ V}</math>, <math>T_A = 25\text{ }^\circ\text{C}</math>, output load impedance <math>50\ \Omega</math>, warm-up 20 minutes (min. 10 minutes recommended)</td> </tr> <tr> <td>Gain</td> <td>                 Transimpedance gain <math>5.0 \times 10^3\text{ V/A}</math> (inverting, @ output load <math>50\ \Omega</math>)                  Conversion gain <math>4.75 \times 10^3\text{ V/W typ.}</math> (@ 1550 nm, output load <math>50\ \Omega</math>)             </td> </tr> <tr> <td>Frequency Response</td> <td>                 Lower cut-off frequency (–3 dB) 10 kHz                  Upper cut-off frequency (–3 dB) 2 GHz (<math>\pm 15\%</math>)             </td> </tr> <tr> <td>Time Response</td> <td>Rise/fall time (10 % – 90 %) 180 ps (<math>\pm 15\%</math>)</td> </tr> <tr> <td>Input</td> <td>                 Noise equivalent power (NEP) <math>11\text{ pW}/\sqrt{\text{Hz}}</math> (@ 1550 nm, 100 MHz)                  Optical saturation power                  210 <math>\mu\text{W AC}</math> (for linear amplification, @ 1550 nm)                  10 mW CW (to prevent saturation, @ 1550 nm)             </td> </tr> <tr> <td>Detector</td> <td>                 Detector InGaAs-PIN photodiode                  Active area (FS/FST version) Ø 100 <math>\mu\text{m}</math>                  Active area (FC version) integrated ball lens, suitable for fibers up to 62.5 <math>\mu\text{m}</math> core diameter                  Spectral range 900 – 1700 nm                  Max. sensitivity 0.95 A/W typ. (@ 1550 nm)             </td> </tr> <tr> <td>Output</td> <td>                 Output voltage range 2.0 <math>V_{PP}</math> (@ <math>50\ \Omega</math> output load)                  for linear operation and low harmonic distortion                  Output VSWR 1.4:1 (@ <math>f &lt; 2.5\text{ GHz}</math>)                  Output return loss 15.5 dB (@ <math>f &lt; 2.5\text{ GHz}</math>)                  Output impedance <math>50\ \Omega</math> (terminate with <math>50\ \Omega</math> load)                  Output noise 2.5 <math>\text{mV}_{RMS}</math> (17 <math>\text{mV}_{PP}</math>) typ. (@ <math>50\ \Omega</math> load, no signal on detector, measurement bandwidth 4 GHz MHz)             </td> </tr> <tr> <td>Input Flange</td> <td>                 Material 1.4305 stainless steel, nickel-plated (FST flange)                  AlMg4.5Mn, nickel-plated (FS flange)             </td> </tr> <tr> <td>Coupler Ring (FST version only)</td> <td>Material 1.4305 stainless steel, glass bead blasted</td> </tr> <tr> <td>Power Supply</td> <td>                 Supply voltage +15 V                  Supply current 150 mA (depends on operating conditions, recommended power supply capability min. 200 mA)             </td> </tr> </table>	Test conditions	$V_S = +15\text{ V}$ , $T_A = 25\text{ }^\circ\text{C}$ , output load impedance $50\ \Omega$ , warm-up 20 minutes (min. 10 minutes recommended)	Gain	Transimpedance gain $5.0 \times 10^3\text{ V/A}$ (inverting, @ output load $50\ \Omega$ ) Conversion gain $4.75 \times 10^3\text{ V/W typ.}$ (@ 1550 nm, output load $50\ \Omega$ )	Frequency Response	Lower cut-off frequency (–3 dB) 10 kHz Upper cut-off frequency (–3 dB) 2 GHz ( $\pm 15\%$ )	Time Response	Rise/fall time (10 % – 90 %) 180 ps ( $\pm 15\%$ )	Input	Noise equivalent power (NEP) $11\text{ pW}/\sqrt{\text{Hz}}$ (@ 1550 nm, 100 MHz) Optical saturation power 210 $\mu\text{W AC}$ (for linear amplification, @ 1550 nm) 10 mW CW (to prevent saturation, @ 1550 nm)	Detector	Detector InGaAs-PIN photodiode Active area (FS/FST version) Ø 100 $\mu\text{m}$ Active area (FC version) integrated ball lens, suitable for fibers up to 62.5 $\mu\text{m}$ core diameter Spectral range 900 – 1700 nm Max. sensitivity 0.95 A/W typ. (@ 1550 nm)	Output	Output voltage range 2.0 $V_{PP}$ (@ $50\ \Omega$ output load) for linear operation and low harmonic distortion Output VSWR 1.4:1 (@ $f < 2.5\text{ GHz}$ ) Output return loss 15.5 dB (@ $f < 2.5\text{ GHz}$ ) Output impedance $50\ \Omega$ (terminate with $50\ \Omega$ load) Output noise 2.5 $\text{mV}_{RMS}$ (17 $\text{mV}_{PP}$ ) typ. (@ $50\ \Omega$ load, no signal on detector, measurement bandwidth 4 GHz MHz)	Input Flange	Material 1.4305 stainless steel, nickel-plated (FST flange) AlMg4.5Mn, nickel-plated (FS flange)	Coupler Ring (FST version only)	Material 1.4305 stainless steel, glass bead blasted	Power Supply	Supply voltage +15 V Supply current 150 mA (depends on operating conditions, recommended power supply capability min. 200 mA)
Test conditions	$V_S = +15\text{ V}$ , $T_A = 25\text{ }^\circ\text{C}$ , output load impedance $50\ \Omega$ , warm-up 20 minutes (min. 10 minutes recommended)																				
Gain	Transimpedance gain $5.0 \times 10^3\text{ V/A}$ (inverting, @ output load $50\ \Omega$ ) Conversion gain $4.75 \times 10^3\text{ V/W typ.}$ (@ 1550 nm, output load $50\ \Omega$ )																				
Frequency Response	Lower cut-off frequency (–3 dB) 10 kHz Upper cut-off frequency (–3 dB) 2 GHz ( $\pm 15\%$ )																				
Time Response	Rise/fall time (10 % – 90 %) 180 ps ( $\pm 15\%$ )																				
Input	Noise equivalent power (NEP) $11\text{ pW}/\sqrt{\text{Hz}}$ (@ 1550 nm, 100 MHz) Optical saturation power 210 $\mu\text{W AC}$ (for linear amplification, @ 1550 nm) 10 mW CW (to prevent saturation, @ 1550 nm)																				
Detector	Detector InGaAs-PIN photodiode Active area (FS/FST version) Ø 100 $\mu\text{m}$ Active area (FC version) integrated ball lens, suitable for fibers up to 62.5 $\mu\text{m}$ core diameter Spectral range 900 – 1700 nm Max. sensitivity 0.95 A/W typ. (@ 1550 nm)																				
Output	Output voltage range 2.0 $V_{PP}$ (@ $50\ \Omega$ output load) for linear operation and low harmonic distortion Output VSWR 1.4:1 (@ $f < 2.5\text{ GHz}$ ) Output return loss 15.5 dB (@ $f < 2.5\text{ GHz}$ ) Output impedance $50\ \Omega$ (terminate with $50\ \Omega$ load) Output noise 2.5 $\text{mV}_{RMS}$ (17 $\text{mV}_{PP}$ ) typ. (@ $50\ \Omega$ load, no signal on detector, measurement bandwidth 4 GHz MHz)																				
Input Flange	Material 1.4305 stainless steel, nickel-plated (FST flange) AlMg4.5Mn, nickel-plated (FS flange)																				
Coupler Ring (FST version only)	Material 1.4305 stainless steel, glass bead blasted																				
Power Supply	Supply voltage +15 V Supply current 150 mA (depends on operating conditions, recommended power supply capability min. 200 mA)																				

## Ultra High Speed Photoreceiver with InGaAs-PIN Photodiode

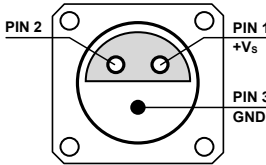Specifications (continued)			
Case	Weight	133 g (0.29 lbs) HSPR-X-I-2G-IN-FST incl. coupler ring 120 g (0.26 lbs) HSPR-X-I-2G-IN-FS 110 g (0.24 lbs) HSPR-X-I-2G-IN-FC	
	Material	AlMg4.5Mn, nickel-plated	
Temperature Range	Storage temperature	-30 °C ... +85 °C	
	Operating temperature	0 °C ... +60 °C	
Absolute Maximum Ratings	Optical input power (CW)	12 mW (averaged)	
	Power supply voltage	18.5 V	
Connectors	Input	HSPR-X-I-2G-IN-FST	1.035"-40 threaded flange for free space applications and for use with various types of optical standard accessories
		HSPR-X-I-2G-IN-FS	25 mm dia. unthreaded flange for free space applications
		HSPR-X-I-2G-IN-FC	FC fiber optic connector (fix/permanent, FC/PC and FC/APC compatible)
	Output	SMA jack (female)	
	Power supply	LEMO® series 1S, 3-pin fixed socket (mating plug type: FFA.1S.303.CLAC52)	
			Pin 1: +15 V Pin 2: NC Pin 3: GND
Scope of Delivery	HSPR-X-I-2G-IN, internally threaded coupler ring (FST version only), LEMO® 3-pin connector, datasheet, transport package		
Ordering Information	HSPR-X-I-2G-IN-FST	1.035"-40 threaded flange for free space applications and for use with various types of optical standard accessories.	
	HSPR-X-I-2G-IN-FS	25 mm dia. unthreaded flange for free space applications.	
	HSPR-X-I-2G-IN-FC	FC fiber optic connector (fix/permanent, FC/PC and FC/APC compatible).	

## Ultra High Speed Photoreceiver with InGaAs-PIN Photodiode


Spectral Responsivity

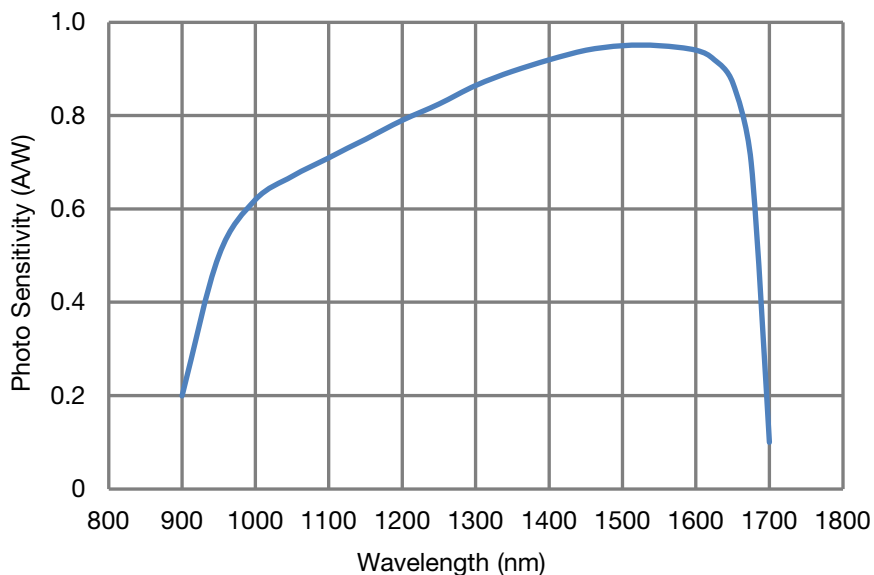

DB-Sens-HSPR-X-I-2G-IN\_R01

Dimensions

HSPR-X-I-2G-IN-FST (1.035"-40 threaded free space input)

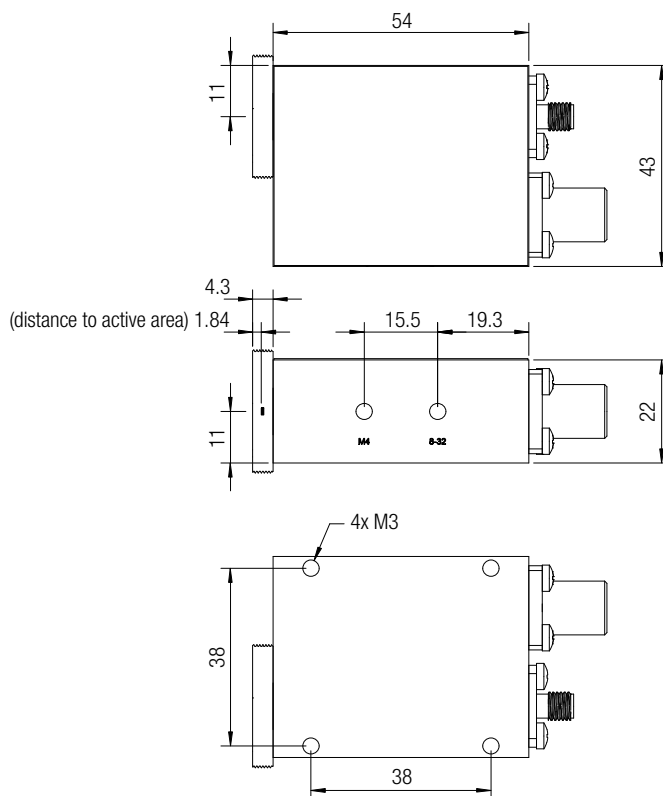


DZ-HSPR-X-I-2G-IN\_FST\_R1

all dimensions in mm unless otherwise noted

# Ultra High Speed Photoreceiver with InGaAs-PIN Photodiode

Dimensions (continued)

HSPR-X-I-2G-IN-FS (25 mm dia. unthreaded free space input)

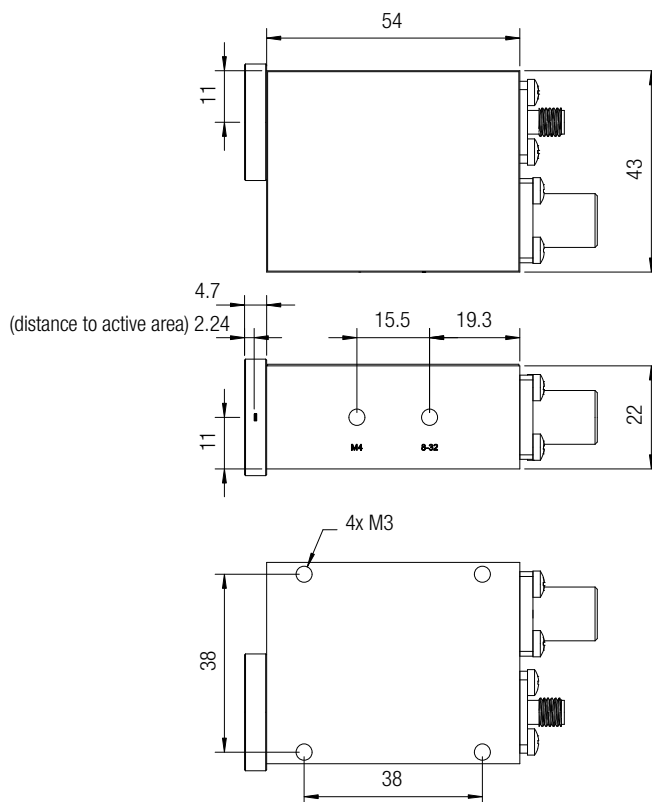


DZ-HSPR-X-I-2G-IN\_FS\_R1

all dimensions in mm unless otherwise noted

# Ultra High Speed Photoreceiver with InGaAs-PIN Photodiode

Dimensions (continued)

HSPR-X-I-2G-IN-FC (FC fiber optic connector)

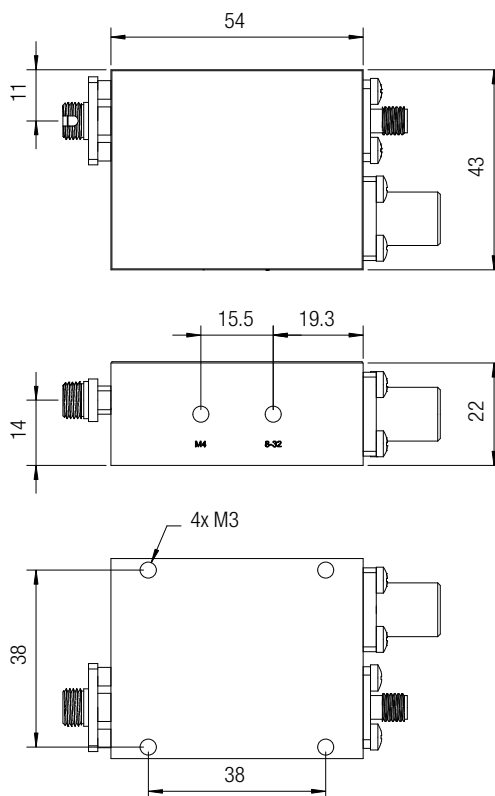

DZ-HSPR-X-I-2G-IN\_FC\_R1

all dimensions in mm unless otherwise noted

FEMTO Messtechnik GmbH  
Klosterstr. 64  
10179 Berlin · Germany  
Phone: +49 30 280 4711-0  
Fax: +49 30 280 4711-11  
Email: info@femto.de  
www.femto.de

Specifications are subject to change without notice. Information provided herein is believed to be accurate and reliable. However, no responsibility is assumed by FEMTO Messtechnik GmbH for its use, nor for any infringement of patents or other rights of third parties which may result from its use. No license is granted by implication or otherwise under any patent or patent rights of FEMTO Messtechnik GmbH. Product names mentioned may also be trademarks used here for identification purposes only.

© by FEMTO Messtechnik GmbH · Printed in Germany